




E20 TYPE - APPROVAL CERTIFICATE
E20*118R03/01*004034*00

MAAD GLF Alu

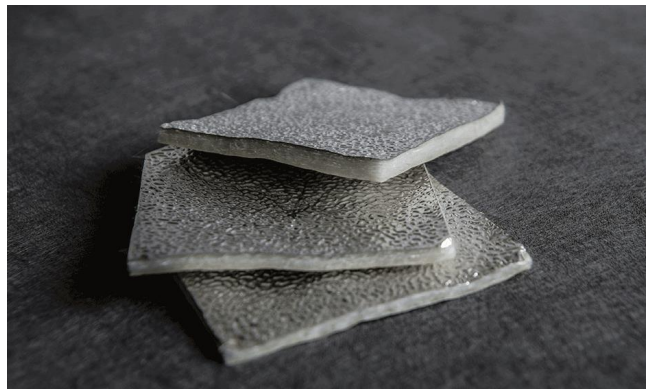

Description

This fiberglass is a highly concentrated and backstitched mat. GLF ALU may be backstitched with cotton thread, polyamide thread, and glass thread for areas with a high temperature. **MAAD GLF Alu has an approval certificate issued by Transport Technical Supervision TDT. The material is registered in an international database IMDS.**

Stable surface of mat allows the aluminum film lamination of various design (smooth or embossed) GLF ALU mat may be self-adhesive and laminated.

Application




TECHNICAL PARAMETERS

WEIGHT	-	1600 g/ m ² ±10%
BACKSTICHD THREAD	-	polyester
FIRE PERFORMANCE	FMVSS 302 DIN 75200 class SE	fulfilled fulfilled
FIRE FEATURES	DIN 4102	inseparable (only synthetic thread burns)
MAX TEMPERATURE	-	550 – 600 °C

SOUND ABSORPTION DIN 52215

Degree of sound absorption according thickness of material and frequency
DIN52215

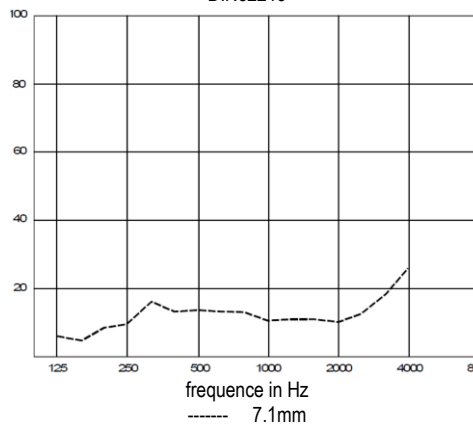

FILAMENT DIAMETER (MICROSCOPE)	-	9 - 14 μm
SMELL	-	odourless

STANDARD DIMENSIONS OF THE MATERIAL

THICKNESS [mm]	STANDARD DIMENSIONS OF THE SHEET * [mm]
5±2; 7±2; 14±2 mm	1600 x 1000 mm

There is a possibility of cutting to size in accordance with your specifications or drawing.
*Other thicknesses / dimensions available on customer's request. Effective dimensions guaranteed as ordered.

OPTIONS**

Maad GLF Alu	without a self-adhesive layer
Maad GLF Alu, SK-M	with a self-adhesive with a mesh layer

** Other composites available on customer's request.

In the case of material with adhesive layer, storage at a temperature of +15 to +30 °C

