


# MAAD RF LIGHT PREMIUM 350

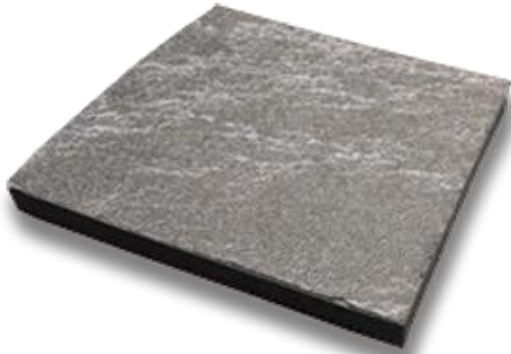

### Descripton

Black closed-cell flexible elastomeric foam (FEF) covered with heat resistance coat

**Extremely flexible and lightweight Thermal insulation,**

They are protected by an ceramic coat covered with aluminum, guaranteeing excellent heat resistance.

Automotive applications, refrigeration, air-conditioning and heating

### Application



### TECHNICAL PARAMETERS:

|   |                                  |                                    |
|---|----------------------------------|------------------------------------|
| Density   |                                  | 40 kg/m <sup>3</sup> + 3mm (layer) |
| Operating temperature range:                                | ICTAC 1998/1999 TG               | -40 °C +350 °C                     |
| Thermal conductivity λ:<br>At a mean temperature of + 40 °C | EN 12667/EN ISO 8497             | ≤0.042 W/m·K                       |
| Thermal conductivity λ:<br>At a mean temperature of 0 °C    | EN 12667/EN ISO 8497             | ≤0.040 W/m·K                       |
| UV resistance   | UNI ISO 4892-2                   | Good                               |
| Water absorption:   | EN 13472/EN 1609                 | < 0,1 kg/m <sup>2</sup>            |
| Fire performance<br>European standard                       | EN 13501 - 1                     | Sheets D-s3,d0                     |
| Ozone resistance  | ISO 7326                         | Excellent                          |
| Antimicrobial<br>behaviour:                                 | AATCC test<br>method 30-<br>2004 | Meets test requirements            |
| Corrosion risk:   | EN 13468                         | Meets test requirements            |

### STANDARD DIMENSIONS OF THE MATERIAL:

| THICKNESS [mm] | DIMENSIONS OF THE SHEET * [mm] |
|----------------|--------------------------------|
| 6,0 – 100,0    | 2000 x 1000                    |

There is a possibility of cutting to size in accordance with your specifications or drawing.

\*Other thicknesses / dimensions available on customer's request. There is the possibility to order the material in the roll. Effective dimensions guaranteed as ordered.

### OPTIONS\*\*\*:

|                                    |  |
|------------------------------------|--|
| Maad RF LIGHT PREMIUM 350          | without a self-adhesive layer          |
| Maad RF RF LIGHT PREMIUM 350, SK-M | with a self-adhesive with a mesh layer |

\*\* Other composites available on customer's request.  
In the case of material with a self-adhesive layer, storage at a temperature of +15 to +30 °C

### ADDITIONAL TECHNICAL PARAMETERS:

#### Storage conditions/shelf life:

Store the material in a dry and clean environment at a temperature between 0 °C and 35 °C and a RH between 50% and 70%. Do not expose the material to heat or direct sunlight before installing. Tapes and self-adhesive sheets should not be kept in storage for more than one year.

For all adhesive materials it is important that the surface is clean, dry and free of grease, oil and solvents.

All specifications are mean values and are made to the best of one's knowledge, are however not binding and exclude any requirements of any kind regarding damages or failures to third-party property rights. Tests should be carried out by the buyer.